




Leading Optical Innovations

Clearlite Photonic Fibers

Polarization-Maintaining

Fiber Name	Operating Wavelength	MFD at Operating Wavelength	Beat Length at Operating WL	Clad/Coating Diameter	Order by Part Number
TruePhase 980 Micro	980 nm	6.6	≤2.8 mm	80/165 μm	F11317
TruePhase 980 400	980 nm	6.6	≤2.8 mm	125/400 μm	F9920
TruePhase 980 245	980 nm	6.6	≤2.8 mm	125/245 μm	F9920-01
TruePhase 1310 400	1310 nm	9.3	≤3.8 mm	125/400 μm	F9922
TruePhase 1310 245	1310 nm	9.3	≤3.8 mm	125/245 μm	F9922-01
TruePhase 1310 Sensor	1310 nm	5.5	≤3.0 mm	125/245 μm	F11358
TruePhase 14XX 400	1400-1490 nm	9.8 (@ 1455 nm)	≤4.2 mm	125/400 μm	BF06832
TruePhase 14XX 245	1400-1490 nm	9.8 (@ 1455 nm)	≤4.2 mm	125/245 μm	BF06832-01
TruePhase 1550 400	1550 nm	10.5	≤4.5 mm	125/400 μm	BF06734
TruePhase 1550 245	1550 nm	10.5	≤4.5 mm	125/245 μm	BF06734-01

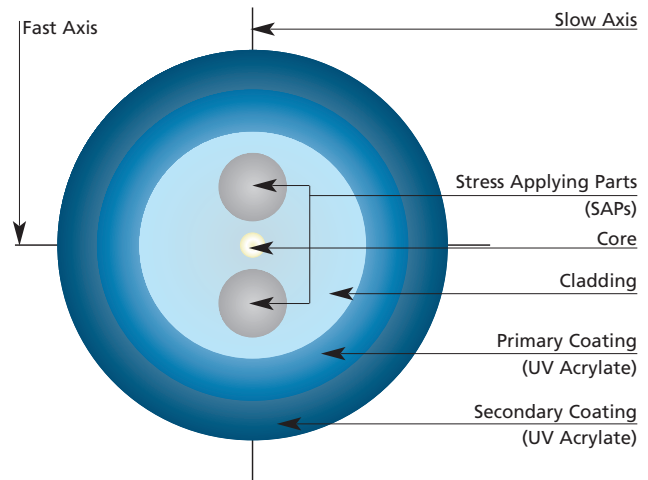

Leading Optical Innovations

OFS Specialty Photonics Division

55 Darling Drive, Avon, CT 06001
 25 Schoolhouse Road, Somerset, NJ 08873
 Priorparken 680 DK-2605 Broendby, Denmark

www.SpecialtyPhotonics.com

This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products and services.

Copyright © 2005 Furukawa Electric North America, Inc.

All Rights Reserved.

ClearLite and TruePhase are registered trademarks of Furukawa Electric North America, Inc.

0505